

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

A

Patent Application of: Theodore D. Wugofski et al.

INDIVIDUALIZED PARAMETER CONTROL FOR MULTIPLE MEDIA SOURCES IN A DATA PROCESSING SYSTEM

Docket No.: 450.219US1

BOX PATENT APPLICATIONS

Assistant Commissioner for Patents
Washington, D.C. 20231

We are transmitting herewith the following attached items (as indicated with an "X"):

- ☒ A Utility Patent Application comprising:
 - ☒ Specification (23 pgs, including claims numbered 1 through 27 and a 1 page Abstract).
 - ☒ 9 Sheet(s) of Formal drawing(s).
 - ☒ A signed Combined Declaration and Power of Attorney (3 pgs).
- ☒ An Assignment of the invention to Amiga Development LLC (3 pgs.) and Recordation Form Cover Sheet.
- ☒ A check in the amount of \$1026.00 to cover the Filing Fee.
- ☒ A check in the amount of \$40.00 to cover the Assignment Recording Fee.
- ☒ A return postcard
- Other: ____


☒ The filing fee has been calculated below as follows:

CLAIMS AS FILED					
	(1) No. Filed		(2) No. Extra	Rate	Fee
BASIC FEE	XXXXXX		XXXXXX	XXXXXX	\$790.00
TOTAL CLAIMS	27 - 20	=	7	x 22 =	\$154.00
INDEPENDENT CLAIMS	4 - 3	=	1	x 82 =	\$82.00
[] MULTIPLE DEPENDENT CLAIMS PRESENTED					\$0.00
TOTAL					\$1026.00

If the difference in Column (1) is less than zero, enter "0" in Column (2).

Please charge any additional required fees or credit overpayment to Deposit Account No. 19-0743.


SCHWEGMAN, LUNDBERG, WOESSNER & KLUTH, P.A.
P.O. Box 2938, Minneapolis, MN 55402 (612-373-6900)

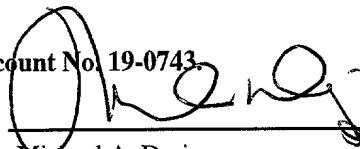By: 
Atty: Michael A. Dryja
Reg. No. 39,662

CERTIFICATE UNDER 37 CFR 1.10:

"Express Mail" mailing label number: EM153178780US
Date of Deposit: January 5, 1998

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, BOX PATENT APPLICATIONS, Washington, D.C. 20231.

By: 
Name: Matthew Hollister

(NEW FILING)

EM153178780US

INDIVIDUALIZED PARAMETER CONTROL FOR MULTIPLE MEDIA SOURCES IN A DATA PROCESSING SYSTEM

5

Related Applications

This application is related to the co-assigned and co-filed applications, "Method for managing multiple channel maps from multiple input devices in a multimedia system," "System for time-shifting events in a multi-channel convergence system," "Method and system for associating web sites to television programs," "System for combining electronic program guide data," "System for scheduled caching of in-band data services," and "Integration of Internet sources into an electronic program database list," all of which are hereby incorporated by reference.

10

Background of the Invention

15

The present invention involves electronic data processing, and more particularly concerns improved control of signal parameter values in a multimedia system having many different media sources feeding single system-presentation devices.

20

25

Personal computers are evolving in several different directions. One of those directions leads toward a larger system including multimedia inputs from many different sources, presented to a user—or a group of users simultaneously—through a set of system output devices which have a configuration similar to that of an entertainment center or a home theater. This type of personal computer converges the capabilities of previously separate systems into a single system having greater capabilities than the sum of its parts, and at the same time reducing cost by eliminating the duplication of components providing the same function in the separate systems. An example of such a "converged system" is the publicly available Destination® PC/TV system from Gateway 2000. This product permits a user to enjoy the capabilities of both a personal computer

5

10

15

20

25

Frequently, however, a user wishes to adjust the signal parameters of the current input device or channel, say to accommodate temporary changes in the program quality

or viewing position, without altering the parameters for other input devices or other channels. Changing the parameters with master controls requires constant readjustment. Adjusting individual manual controls usually involves tricky adjustments in controls which are inconveniently positioned and whose locations have been forgotten.

5 Moreover, adjusting such controls from an actual viewing position is much easier than when leaning over the rear of a large display monitor.

Summary of the Invention

10 The present invention provides facilities for separately adjusting the signal parameters of each of multiple input devices to a common output or presentation means. The adjustment uses a single parameter-modification facility for all devices. A single table contains stored values for a number of parameters for each input device separately, arranged as a set of entries for each device. When a user selects a device, the entry or

15 record pertaining to that device transmits its parameter values to a facility for modifying the signal from the selected input device to the presentation devices. This permits the display device to behave as though each input device included individual adjustment controls.

A single set of parameter-adjustment controls permits a user to modify the value

20 of any parameter for the currently selected input device. The new parameter value replaces the previous value for that parameter only in the table entry for the currently selected device, and takes effect in the presentation device immediately. Combining the parameter controls with the selection facility at the viewing location also permits the user to observe the effects of the changes immediately.

25 Further aspects and features of the invention, as well as variations obvious to those of ordinary skill in the art, will appear from the following description of a preferred embodiment thereof.

Brief Description of the Drawings

Fig. 1 shows an overall multimedia computer system incorporating the present invention

5 Fig. 2, comprising Figs. 2A, 2B, 2C, and 2D, show the details of different configurations for the user-control device of Fig. 1.

Fig. 3, comprising Figs. 3A and 3B, illustrate parameter tables of Fig. 1.

Fig. 4 is a flowchart of a method of controlling multimedia parameters according to the invention.

10 Fig. 5 is a flowchart of another method of controlling multimedia parameters according to the invention.

Detailed Description of the Embodiments

365070-0652060
The following detailed description refers to the accompanying drawing which forms a part hereof, and which shows by way of illustration specific embodiments in which the invention may be practiced. These embodiments are described in sufficient
15 detail to enable those skilled in the art to practice the invention. Other embodiments may be employed, and logical, mechanical and electrical changes may be made without departing from the spirit and scope of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense; rather, the scope of the
20 invention is defined only by the appended claims.

Fig. 1 is a high-level block diagram of hardware for a multimedia convergence system 100. Embodiments of the present invention may be included in, or developed in conjunction with, a software architecture of a computerized convergence system as described in commonly assigned U.S. patent application entitled "Architecture for
25 Convergence Systems," filed on even date herewith, which application is hereby incorporated by reference.

One or more conventional buses 110 interconnect a processor unit 111 to a number of other subsystems. Memory 120 commonly includes ROM 121 for holding

BIOS and other low-level fixed program code and system data; RAM 122 holds an operating system, application programs, data, and other information. Internal off-line storage subsystem 130 may include a hard disk 131 with its bus adapter 132, and one or more removable media facilities, such as diskette drive 133 and adapter 134, and optical (CD-ROM, CD-RW, DVD, etc.) drives 135 and adapter 136. The components of subsystem 130 normally reside within the same physical enclosure, indicated by dashed line 101. Standard I/O adapters 140 may connect system 100 to external devices such as printers, and local-area networks (not shown). A modem 141 commonly connects to a standard serial interface in adapters 140 for connection via line 142 to a telephone line, ISDN line, or similar communications device (not shown).

Devices 150 for accepting user input to control system 100 may include a keyboard 151 and a pointing device 152, along with their bus interfaces or adapters 153. In most present personal computers, user input devices attach to internal adapters by wires. In a convergence system of the type to be described, however, it may be preferable instead to attach them to adapters 153 by wireless RF or infra-red (IR) links 154. Also, pointing device may take the form of a handheld remote having a trackball and a number of keys, rather than the more traditional desktop mouse. Numeral 155 calls out the user-input facility employed by the present invention, described in detail below. Facility 155 may be located on pointing device 152 or even in a separate housing, rather than on keyboard 151. It is important in any case that facility 155 be capable of operation from a position where the user normally views and listens to the system output devices 160.

System output devices 160 commonly include a video monitor 161 and an audio system 162 connected to internal system adapters 163 and 164 by wiring 165 and 166. In a converged system such as 100, the monitor may have a larger screen size and more features than those for a traditional PC, and the audio components may include a multichannel amplifier and more numerous, higher-quality loudspeakers. Video adapter 163 is commonly a card plugged into to an internal ISA or PCI slot for accepting digital

video data from bus 110, storing it, processing it in some cases, and converting it to analog signals for transmission to monitor 161. Sound adapter 164 is usually a separate card plugged into an ISA slot in bus 110; it accepts digital data representing sounds from the bus, it may generate the digital waveform from a coded representation such as MIDI, and it converts the digital waveforms to analog form. In a convergence multimedia system such as 100, adapters 163 and 164 may be physically and electrically integrated with each other and share some functions; they may also be physically located within the output devices, rather than within computer enclosure 101. Parameter controllers 167 and 168, described more fully below, hold digital values representing certain parameters employed in the invention, and modify the signals from the input devices in accordance with the parameter values. These controllers may be physically located either on adapter cards 163 and 164 for affecting the video and audio signals transmitted over wiring 165 and 166, or for relaying the control signals to the system output devices for affecting the device parameters there. Control registers 167 and 168 may instead be physically located in the devices, as indicated by dashed blocks 167' and 168'; the control signals would then be transmitted directly to the devices via wiring 165 and 166.

Media input subsystem 170 selectively couples a number of media sources 171 to the set of system output devices 160. The input devices may include a number of video (actually audio/video) sources such as a television tuner 171a, a digital satellite service (DSS) receiver 171b, digital video disc (DVD) player 171c, a video tape recorder (VTR) 171d, and a plug 171e for an auxiliary video source; a number of audio sources may include a compact-disc (CD) player 171f and changer 171g, a port 171h for a standard musical-instrument digital interface (MIDI) signal, and an auxiliary audio source 171i. Other devices, and devices for other types of media, may be connected as well. Some of these devices, such as TV 171a and DSS receiver 171b, receive signals on multiple channels; others, such as CD player 171f, usually receive only a single signal. For convenience, devices capable of receiving multiple selectable input signals

or channels will be called "tunable" devices, although it is to be understood that the signals or channels might be selected by operations other than frequency tuning. Likewise, the term "channel" must be understood in a broad sense as referring to different media content from a single device, whether the content be a signal of a different frequency, a different disc in a carousel CD player, or any other selection from a single device.

Normally, most of the input devices are physically located externally to the main system enclosure 101, mostly because they are physically large in comparison with a personal computer, and because they have been commonly used separately from a personal computer. In a convergence system of the present type, however, it may be both desirable and possible to locate some or all of them within the same enclosure. TV tuners, for example, now exist as single cards for use with the monitor of the PC as its only output device, and many PCS include facilities for playing audio discs from the built-in CD-ROM players whose primary purpose is to enter programs and data into the computer, using the small system speakers as output devices. (In Fig. 1, internal CD player 135 may serve as one of the media input devices, say 171d, merely by connecting its audio output to adapter 172 in place of an external drive such as 171f, as indicated by line 136.)

Adapter 172 receives media input signals from all of the input devices 171. This adapter may take the form of a single card plugged into bus 110, multiple cards on the bus, or any other suitable configuration. In some systems, it may be desirable to locate the adapter within enclosure 101, as shown in Fig. 1. In other systems, it may be more convenient to construct the adapter and its components as a separate unit, perhaps as a set-top box physically located on or near one or more of the devices 171. A switch or multiplexer 173 responds to a channel-control signal on line 174 for selecting one of the input signals and passing it to the appropriate system output devices 160. Control signal 174 may proceed from keyboard 151, either directly or through a program running in processor 111. Adapter 172 may, if desired, perform any conventional form of signal-

processing, mixing, and/or other conventional functions upon the input signals, either before or after selecting them in switch 173. The selected input signal then proceeds to output devices for presentation via line 175 to devices 161-162 or via their internal adapters 163-164. Alternatively (or in addition), line 176 may carry the signal to bus 110 for manipulation in a digital form by a program executing in processor 111, and thence to output subsystem 160 for presentation.

In addition to the other facilities for modifying parameters of individual devices, system 100 also includes a master or system parameter control. Master controller 177 contains register locations for holding a value of each parameter (brightness, contrast, etc.) that modifies the corresponding parameter of whichever signal is selected as the system input by switch 173. That is, controller 177 modifies the parameter values of all signals on lines 115 and 176, to provide a "system level" baseline, about which the user can vary the parameters separately for each input device. This provides a way to match the system output devices 160 more closely to signal values common to many input devices 170, and also provides a way for a user to change quickly a parameter, such as volume, temporarily to a lower level without having to select or reselect an input device first. The register locations may be realized in nonvolatile memory, or stored and reloaded for each session, to provide persistent control across multiple sessions. Controller 177 could be placed at other locations within system 100, and it could exist as multiple pieces in different locations. It receives parameter values from bus 110 on lines 178.

Fig. 2A shows a portion of keyboard 151, Fig. 1, that serves as a user-entry device 155 for the invention. A conventional array of data-entry keys 210 occupies the usual area of the keyboard. An area 220 above these keys, and extending at least partially across the width of the keyboard on the keyboard enclosure, holds other controls for interacting with system 100. Dedicated input-selection buttons or keys 221 select one of the sources 171, Fig. 1. These buttons are preferably visually distinct from data-entry keys 210, and may comprise round buttons having limited travel and a

distinctive tactile feel, such as a slightly domed rubbery surface, and raised only a few millimeters above the surface of area 220. Source-selection buttons 221 are divided into a group 221a-221e for video sources and a group 221f-221i for audio inputs. A printed label 222 identifies each group, and the name of the individual source appears on its button. Preferably, depression of a button produces the same type of scan code as that conventionally produced by data-entry keys 210. Connection 154, Fig. 1, then sends any of these scan codes to adapter 153 in the same manner as those from the other keyboard keys.

Parameter-control buttons or keys 223 are positioned below selection buttons 221 in area 220. Buttons 223 also preferably have a size, shape, and feel distinct from data-entry keys 210. In Fig. 2A, a pair of triangular buttons modifies each parameter for the selected source. Button pair 223a controls the brightness of the video for selected source on monitor 161, Fig. 1. Pressing the upper button increases the brightness, while pressing the lower one decreases brightness. Buttons 223b-223e control the contrast, color, tint, and video sharpness parameters in the same manner. Buttons 223f-223i control parameters of the audio signal for the selected source. Because buttons 223 are smaller, their labels are printed on the keyboard surface, rather than on the buttons themselves. Although the video and audio control buttons are grouped with the selection buttons for audio and video sources respectively, the audio controls affect the indicated audio parameters of the video sources, as well as those of the strictly audio sources. Buttons 223 generate and transmit scan codes in the same way as described for the selection buttons 221. Instead of being pairs of separate buttons, the control for each parameter could be a rocker switch or similar conventional means. Keyboard 151 may produce a scan code once for every depression of a button 223; alternatively, a single depression could produce a timed sequence of scan codes as long as the button is held down.

For tunable devices 171 capable of receiving multiple channels, stations, or other multiple input signals, the user may select particular channels via data keys 210, or in any other conventional manner.

Fig. 2B shows a portion of another keyboard configuration serving as a user input facility 155 for entering selection choices and parameter values. Source-selection buttons 231 for the labeled audio sources are grouped together in area 230 of keyboard 151. Button 231a selects a CD player, as above. Button 231b selects the sound from a TV; that is, button 231b may route the sound from a video source as well as from a strictly audio source. Button 231c selects the system's modem 141 as a sound source. Although the modem is not strictly a media source, system users often wish to hear the progress of a modem line-connection sequence. Conventional systems therefore route the analog modem signal to the system speakers 162 while a connection is being established. Button 231c may select the modem signal to the exclusion of other audio sources, or may mix it with the previously selected source during the connection interval. Alternatively, the modem audio signal might be permanently mixed with the selected source, in which case pressing button 231c merely causes adapter 172 to select the modem signal on line 142 for modification by parameter-control keys 232.

Parameter-control buttons 232 modify the volume of whichever audio source is currently selected by buttons 231. Fig. 2B also illustrates additional methods for controlling device parameters. In a first alternative, a user continues to depress a source-selection button after pressing it to select a source device 171. During the time this button remains depressed, the user may press one of the parameter-control buttons 232 to increase or decrease the volume parameter. A second alternative employs a defined time interval or duration. After a selection button 231 is pressed and released, an indicator such as visible light-emitting diode (LED) 233 blinks for a few seconds. During this interval, the user may adjust the volume of the selected source by pressing one of the parameter-control buttons 232. A third alternative incorporates either of the first two, and adds another function: if the user presses a parameter-control button 233

without holding down the selection key, or outside the interval indicated by LED 233, the effect is to adjust a master volume-parameter level common to all input signals from all audio sources, as described below in connection with Fig. 5. Fig. 2B also includes a mute toggle button 234. This button is located within the same keyboard area 230 as the source-selection and parameter-control buttons, but it affects all audio sources independently of them. Labels 235 appear in a single row for all buttons. As in Fig. 2A, data keys 210 or other conventional means can be employed to selected among the channels of tunable input devices.

Fig. 2C shows an alternative user input device 155 in the form of a wireless hand-held remote control 240. Source-selection buttons 241 correspond to buttons 231 in Fig. 2B. Button 241a selects a CD player such as 171f, Fig. 1, as the media source; button 241b selects TV tuner 171a; and button 241c selects the systems network interface device 155. Buttons 242 control the volume of the selected device, similarly to buttons 232 of Fig. 2B. Mute button 244 performs the function of button 234.

Numerals 245 indicates a trackball, and 246 represents conventional left/right selection buttons for the trackball. These are used in connection with the alternative interface described in connection with an alternative interface, shown in Fig. 2D. Here, the screen 261 of monitor 161, Fig. 1, displays a cursor 262 controlled by trackball 245 and selection buttons 246 of wireless remote 240, Fig. 2C, for engaging a graphical user interface (GUI) 250 displayed on the screen. That is, the user may select a source device by placing cursor 262 on control buttons 251a-251e and pressing the left selection button 246 on the remote. Control 252 selects and deselects this group of video sources. Clicking on controls 253a-253e increases or decreases the indicated video parameters in the same way as does pressing the physical buttons 223a-223e in Fig. 2A. Control 253f varies the audio volume. Control 254 provides a 'mute' function, and 255 controls the device power. Clicking button 256 returns all parameters to default values. These values can be hardwired into each video source device, set by the user in a preferences mode, or established in any other convenient manner. Control

257 provides an alternative to buttons 253 for varying the parameters. When a user deselects one of the parameters 253a-253f, dragging the slider 258 with trackball 245 changes the parameter.

Fig. 3A represents a table 300 stored in memory 120 of system 100, Fig. 1.

5 Table 300 has a number of rows or entries 310, one for each media source 171 in the system, as indicated by the legends at the left of the table.. Each entry contains a number of cells such as 321 that, taken together, define a number of columns 320. Each table cell contains a digital quantity representing a value for the parameter named at the top of the columns. If each table cell is one byte, for example, values from '0' to '255' in
 10 column 320a may represent brightness from completely dark to a maximum for monitor 161, with '128' being an approximate midpoint value. Of course, values may run in the other direction for some or all parameters, and some or all of the table values may be logarithmic or any other function of the actual parameter valued for the associated output device 160. It is of course possible to assign different directions and different
 15 functions for different parameters, and for the same parameter for different devices—that is, for the same column in different entries in the table. Also, different parameters may have different lengths than others, giving greater or less resolution for some parameters. The entries for strictly audio devices, such as 'CD1', possess columns for video parameters inapplicable to them; the values for these cells are irrelevant, and
 20 are shown blank. To save some memory space, rows 310f-310i may be removed and columns 320f-310i thereof stored as a separate subtable 330. Linked lists or other data structures may be used instead of table 300 as a structure for holding the parameter values of all the sources, if desired.

Fig. 3B shows part of an expanded table 300, labeled as table 340. This version
 25 establishes a set of profiles, not only for multiple input devices, but also for multiple channels within tunable devices capable of receiving many input signals or channels. Table 340 adds a column 321 designating channel numbers for each device. These

numbers may represent physical channels, or they may correspond to internally generated logical channel designations.

For example, the single record 310b for DSS receiver 171b becomes multiple records such as 311-313. Record 311 may correspond to a movie channel ('156') on the satellite system, where the user desires a high audio volume, maximum bass, and enhanced treble. Record 312 may represent a news network (channel '202') having a low volume suitable for background listening. Record 313 may correspond to a sports channel where the user wishes a high volume but no enhanced bass or treble. Records 314-317 represent similar individual channel-parameter profiles for TV tuner 171a, Fig. 1. Other parameters not shown in expansion 340 can also participate in the per-channel profiles. It is, of course, possible to provide for further types of user profile as well, based upon factors other than, or in addition to, channels.

Tables 300 and its variants must persist over multiple user sessions, between which system 100 might be powered off or memory 120 made unavailable for some other reason. Therefore, although table 300 is normally stored in RAM while in use, it should be also stored in a nonvolatile location, such as on hard disk 131. Alternatively, table 300 need not exist as a unified memory structure at all. It is entirely possible to store, for example, entry 310a for TV 171a in a nonvolatile register 179 associated with master controller 177. It is also possible to store the video parameters for all media devices producing a video signal in a subtable containing the first five columns and the first five rows of table 300, within monitor 161, and to store the audio parameters for all media devices producing an audio signal in another subtable, containing the last four columns for all nine entries, physically within system audio device 162.

A software architecture for managing the hardware of a multimedia convergence system 100 is shown in the aforementioned U.S. patent application Ser. No. _____ (Attorney Docket 450.225US1). Generally, a convergence system operates at least partially under the control of a standard operating system, such as Microsoft® Windows95®. In addition, the aforementioned application describes a number of

specific systems services, drivers, and interfaces that, although not necessary for implementing the present invention, provide a background for the functions described below.

Fig. 4 is a flowchart 400 showing how system 100 controls and modifies multimedia parameters while presenting media signals from different input devices 170 to the set of common system output devices 160, Fig. 1. Flowchart 400 begins at entry point 401.

When a user presses one of the buttons in media-input facility 155, step 410 generates a conventional keyboard interrupt and passes the scan code on output 411 for a device-select button such as 221 or 231, output 412 for a parameter button such as 222 or 232, and to output 413 for data-entry keys 210 or for another type of media-control button, such as mute 234, Fig. 2. (The scan code, or an equivalent interrupt signal, could also come from a scheduler or other service provided by the software of system 100.)

For a device-selection call 411, step 420 sends a selection signal 421 to switch 173, Fig. 1, connecting the selected media input device 171a-171i to the system output devices 161, 162, etc. Step 430 accesses the appropriate entry or row of table 300, such as entry 310c, as indicated by arrow 431. Step 440 then transfers all the parameters in columns 320 of the selected entry to the control registers 167, 168 of the appropriate output devices, as symbolized at 441. This step may take a number of forms, depending upon the location of table 300 and registers 167 and 168 within system 100, and may in some cases not require any actual transfer of data from one location to another. Step 450 completes the device selection. Usually, this entails activating the selected input device 171 at substep 451; it may also include turning on or reconfiguring an output device in subsystem 160 at substep 452, display a configuration window on monitor 161 (substep 453), and other functions. Completion of the last function in step 450 returns control at exit point 402 to whatever other routine was interrupted at entry point 401.

A parameter-modification call 412 receives the parameter-control scan code at step 460, for the proper parameter for the currently selected input device in table 300. For example, an "increase contrast" scan code requires accessing the contents of the "contrast" column 320b at "DVD" entry 310c, as shown at 461 and 462. Step 470 then determines the new value of this parameter. Many methods may be appropriate for calculating a new value, and different methods may be employed for different parameters. For example step 470 may increment it or decrement the value, look up a new value in the next or previous row of a function table (not shown), carry out a numerical calculation, or perform any of a number of similar operations. Step 480 then effects the parameter change. Substep 481 replaces the previous value of the cell accessed at 462 with the value produced in step 470, as indicated at 482. Substep 483 replaces the current parameter value in device register 167 or 168 with the new parameter value, as shown at 484. Control then passes to exit 402, as before. Flowchart 400 generally follows the functions described above in connection with Fig. 2A.

In addition to providing separate parameter settings for different devices, the present system can also implement multiple profiles for some input devices 171. For example, a user may desire different parameter settings for different channels on a tunable device such as a TV tuner or DSS receiver. When this feature is desired, step 410 passes control on line 411 not only for device selection, but also when the user selects a channel in a tunable input device. Block 422 switches the current device to the chosen channel. Block 432 accesses the profile record in the expanded form 340 of table 300 corresponding to the particular channel of the current device, as read from column 321, Fig. 3B. Block 440 sets the system controls as before, but now with the parameter values of the profile for the selected channel, rather than with generic values for the input device as a whole.

When the channel profiles are in use, modifying a parameter via line 412 causes block 461 to access parameters of the selected profile for the current input device. Channel input 462 can obtain a designation of this channel from blocks 422 and/or 432.

When block 481 later writes the new parameter values into the expanded form of the table 300, it places them in the profile for the current channel.

Although channel-parameter changes are made in device registers 167 and 168 immediately, it might be desired in some cases to have block 481 delay writing the new values into the table until the user exits the channel, selects "save" on the user input device, or until some other event occurs. Also, it may be desirable to ask the user to confirm certain changes before they are written back to the table profile. For example, the user may have lowered the audio volume drastically in order to answer a telephone call. Block 485 requests confirmation of certain changes, such as a drastic parameter variation, and blocks changes that are not confirmed.

Other features may be included as well. For example, some or all of the input devices 171 can have default values defined by the hardware or by the user. Certain devices or certain profiles may contain a lock to prevent any user changes to the stored parameter values.

Fig. 5 is a flowchart 500 showing method steps for implementing the functions described in connection with Fig. 2B. Steps shared with flowchart 400 are shown reduced in Fig. 5. In method 500, the recognition of a device-selection button press at 411 activates a parameter-set interval at step 510; during this interval, one or more parameters may be modified.. One way to define this interval is by a fixed-period timeout, as at 511. A visible or audible indicator may signal this interval to the user. Alternatively, substep 512 may continue the interval as long as a device-selection button is held down. At the expiration of the parameter-set interval, step 510 passes control to steps 420-450 as in Fig. 4.

During the interval activated by step 510 (indicated by arrow 513), step 520 passes control via exit 521 to blocks 460-480 to modify parameter values for individual devices as shown in Fig. 4. At other times, however, exit 522 passes control to step 530. This step receives the scan code from the button press or other source, and substep 531 accesses from master controller 177 the parameter value indicated by the scan code.

Step 540 determines the new value of that parameter, preferably in the same way as does step 470. Step 550 then writes the new parameter value back into master controller register 177, and exits at point 402.

- 5 Although specific embodiments have been illustrated and described herein, those of ordinary skill in the art will appreciate that any elements or arrangements of elements capable of achieving the same purpose may be substituted for the specific forms shown. This patent is intended to cover all adaptations or variations of the invention, limited only by the following claims and equivalents thereof.

065079 0662060

We Claim:

1. A multimedia system comprising:
 - a plurality of media input signals;
 - 5 at least one setting associated with said signals which controls presentation of media from said signals; and wherein each of said signals is associated with a value for said setting to thereby allow independent control of said setting for each of said signals.
2. A system according to claim 1, further comprising a media subsystem having a
 - 10 plurality of media input devices for providing said media input signals.
3. A system according to claim 2, wherein at least some of said media input devices provide audio media input signals.
4. A system according to claim 3, wherein at least some of said media input devices
 - 15 additionally provide video media input signals.
5. A system according to claim 1, further comprising:
 - an user input device for producing a selection command; and
 - 20 a media adapter for selecting one of said media input signals for presentation to said user in response to said selection command, said media adapter controlling said media signal in accordance with the value of said setting for said one media signal.
6. A system according to claim 5, further comprising a common output device for
 - 25 presenting said one media signal to said user.

7. A system according to claim 5, wherein said user input device further produces a setting modification command, and wherein said adapter is responsive to said modification command to modify the value of said setting for only said one media signal.

5

8. A system according to claim 7, wherein said user input device is a keyboard having a number of buttons for producing said selection and modification commands.

10

9. A system according to claim 8, wherein said user input device includes a graphical interface displayed on said common output device.

10. A computer-readable medium containing computer instructions and data for carrying out the steps of:

15

associating a value of a setting with each of a plurality of media input signals in a multimedia system;

selecting one of said media input signals for presentation to a user of said system; and

presenting said one media input signal to said user with the value of said setting associated with said one media input signal.

20

11. A medium according to claim 10, wherein said associating step further associates a plurality of settings with each of said media input signals.

25

12. A medium according to claim 11, further comprising a data structure for holding said values for all of said settings, said structure having a separate entry for each of said media input signals.

13. A medium according to claim 10, wherein said method further comprises:

receiving a modification command from said user; and

modifying the value of said setting for only said one media signal.

5 14. A method for controlling a multimedia system configured to receive a plurality of multimedia input signals and present media from at least one of said input signals to a user through at least one output device, said method comprising:

selecting one of said sources in response to a selection command to said system;

10 retrieving, from a table of parameter entries associated with said sources, at least one parameter value corresponding to said one source; and

presenting media from said one signal to said output device in accordance with at least one retrieved parameter value.

15 15. A method according to claim 14, wherein each of said parameter entries holds multiple values each corresponding to a different presentation of media from said signals.

20 16. A method according to claim 15, wherein a first group of said parameter entries controls the presentation of media from a first output device, and a second group of said parameter entries controls the presentation of media from a second output device.

17. A method according to claim 14, wherein said selecting step comprises:

receiving a selection code from said user representing said predetermined one signal; and

25 switching said one input signal to said one output device.

865079" 06520069

18. A method according to claim 14, comprising the further steps of:

receiving a parameter code for modifying the value of said parameter for only a particular one of said input signals;

producing a modified value of said parameter in response to said code;

5 storing said modified parameter value in an entry of said table corresponding to said particular one input signal; and

thereafter, presenting media from said selected signal to said output device in accordance with said modified parameter value.

10 19. A method according to claim 18, wherein said particular one signal is said predetermined one of said signals currently selected in response to said selection command.

15 20. A method according to claim 18, wherein said parameter code is received from said user.

21. A method according to claim 18, wherein each of said table entries holds multiple values each corresponding to a different one of a plurality of parameters associated with the presentation of media from said signals.

20 22. A method according to claim 21, wherein said parameter code further specifies a particular one of said parameters as said parameter to be modified.

23. An information-handling system comprising:

25 means for receiving a plurality of media input signals;

means for associating at least one setting with said signals for controlling presentation of media from said signals, wherein each of said signals is associated with

865070" 06620060

5

10

15

20

27. A system according to claim 23, further comprising means for produces a setting modification command, and wherein said selecting means is responsive to said modification command to modify the value of said setting for only said one media signal.

Abstract of the Disclosure

5 A multimedia system has multiple media sources switchable under user control to a common set of output presentation devices. A table stores parameter values for each media source separately, so that selection of a source changes the parameters of the displayed media to values appropriate for that source. A user input device has selection keys, and also has keys for modifying the values of the parameters. The modified parameter values are stored in the table, so that they persist when the same media device is selected at a later time.

Express Mail® mailing label number EM15317878005
 Date of Deposit JANUARY 5, 1998
 I hereby certify that this paper or for ad with the
 United States Postal Service "Express Mail" service to Addressee"
 service under 37 CFR 1.10 on the date indicated above and is
 addressed to the Assistant Commissioner for Patents,
 Washington, D.C. 20231
 Printed MATTHEW HOLLISTER
 Signature [Signature]

09006900 010599

005070" 06620050


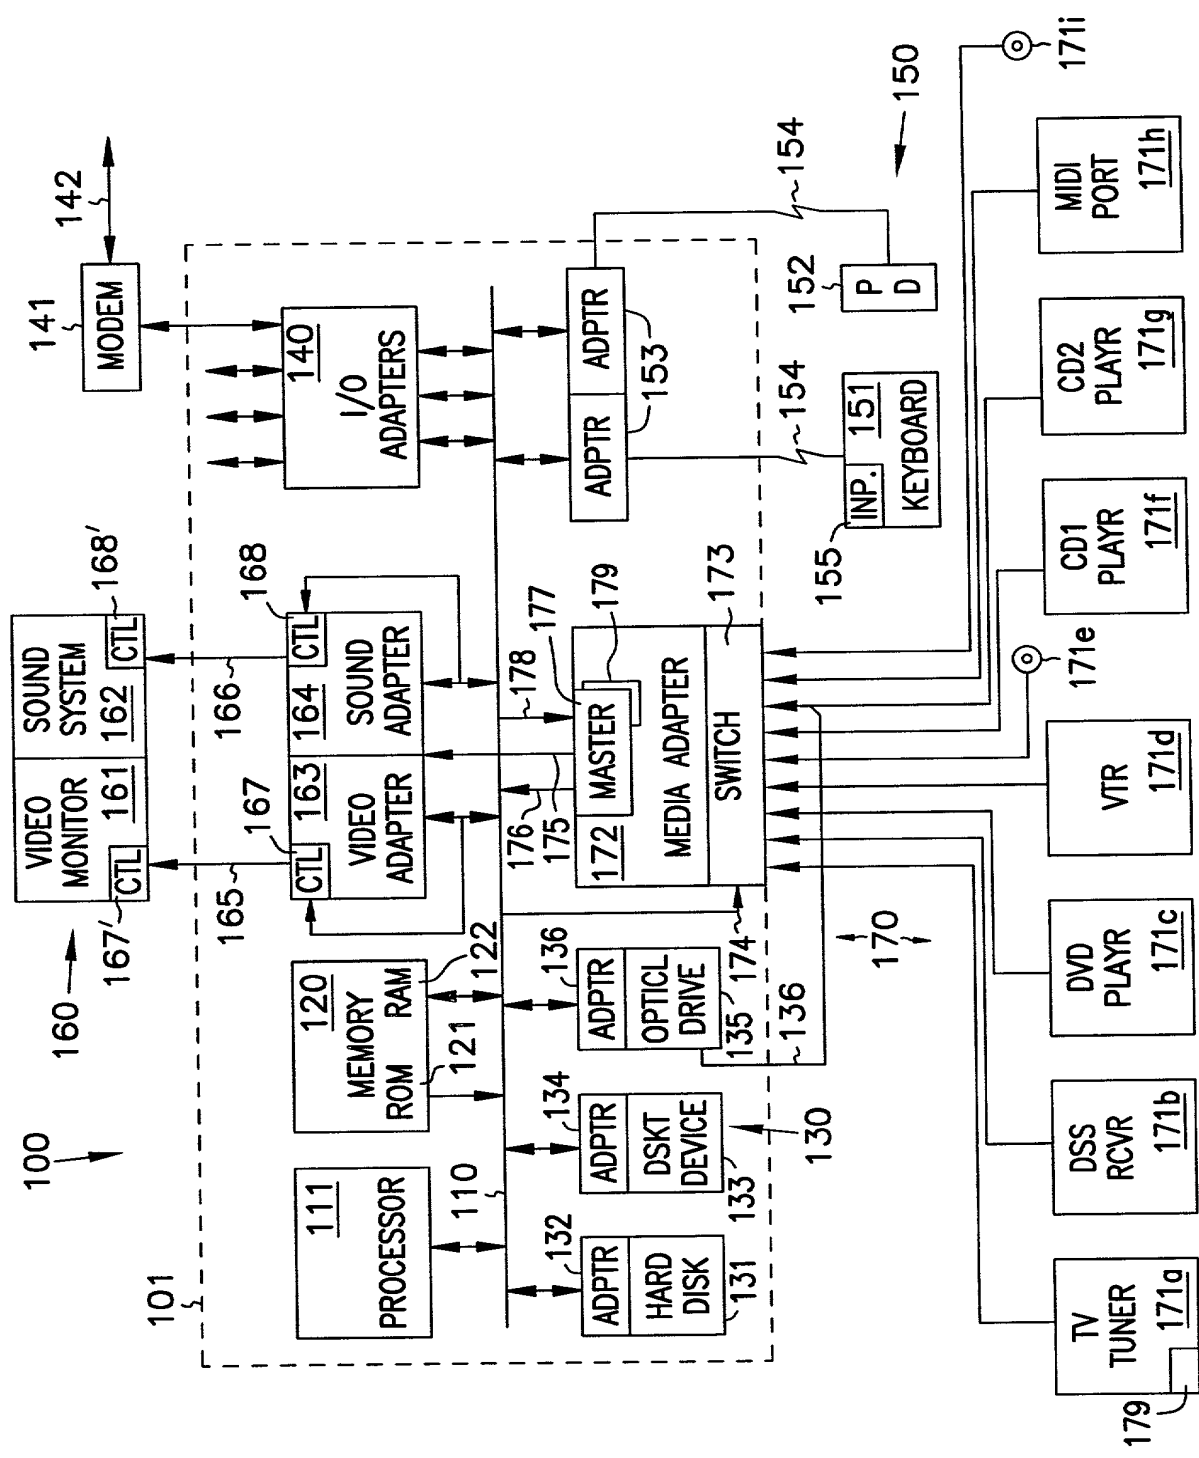


FIG. 1

06520060

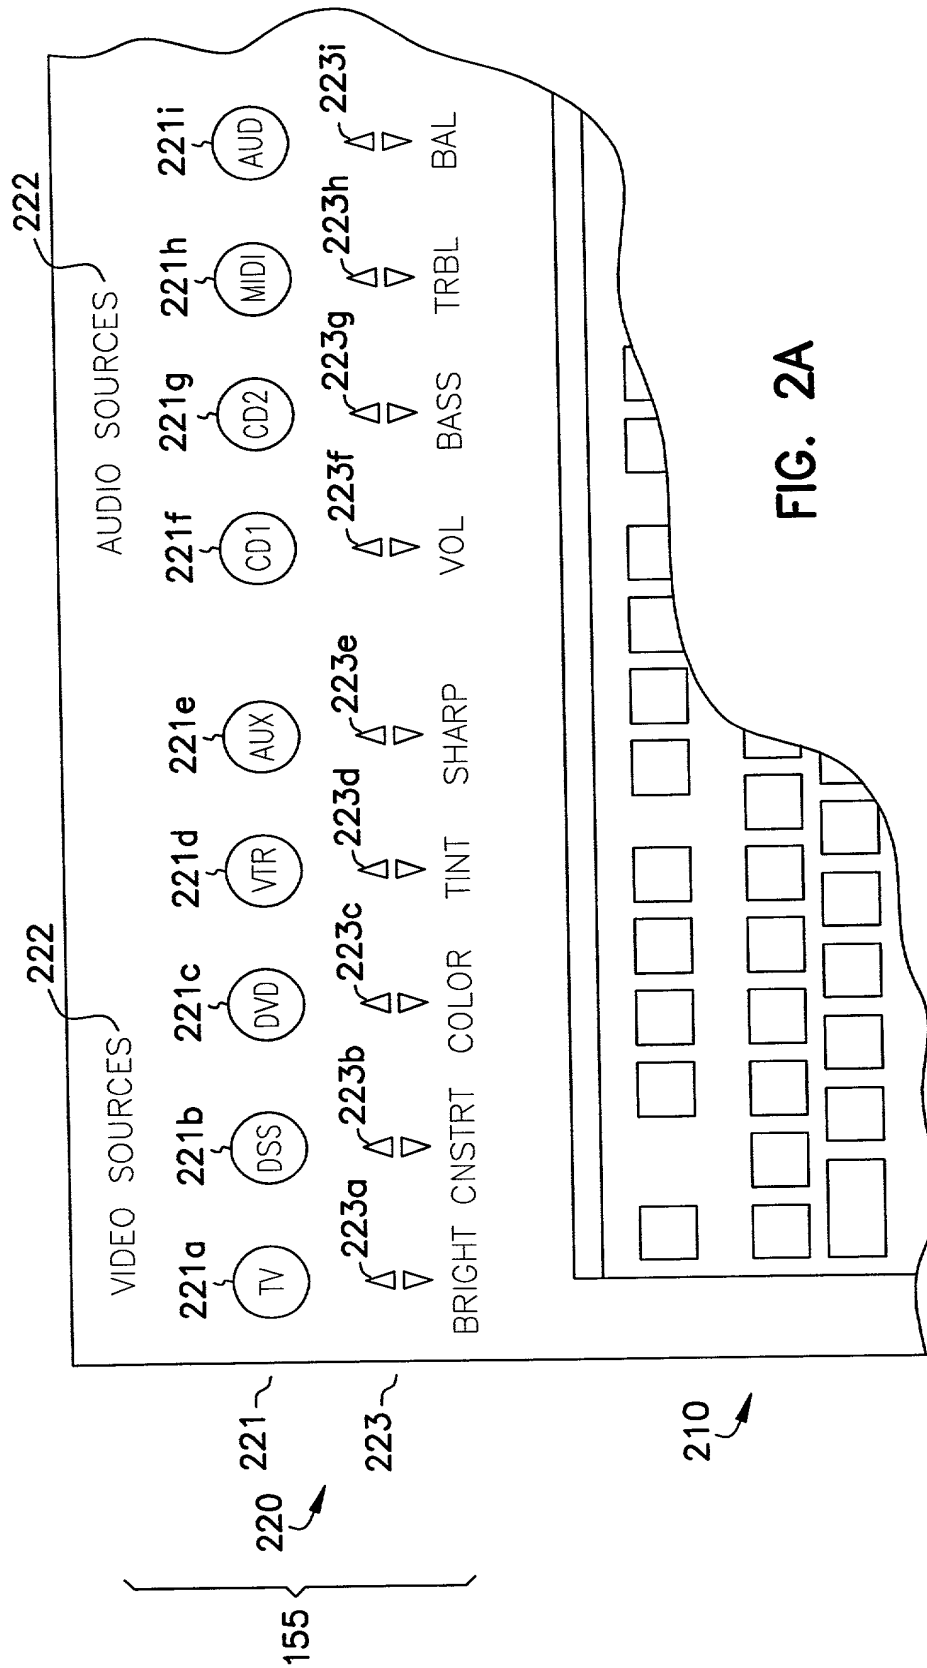

865379" 05520060

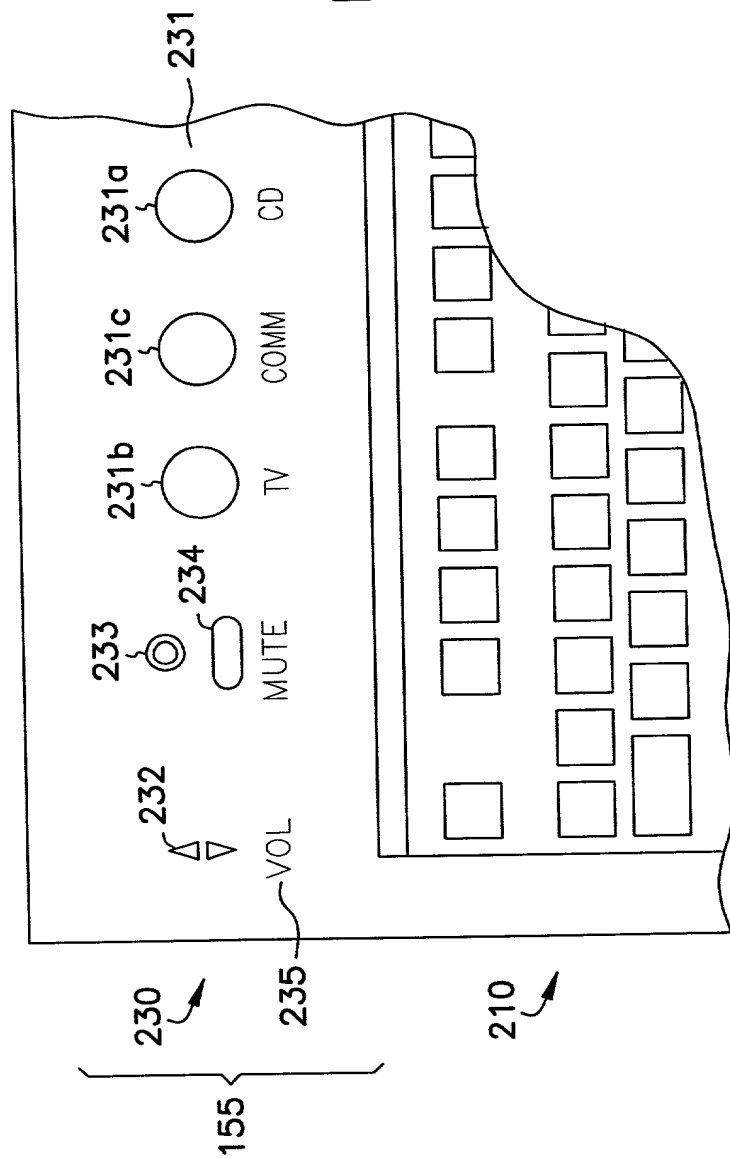


FIG. 2B

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

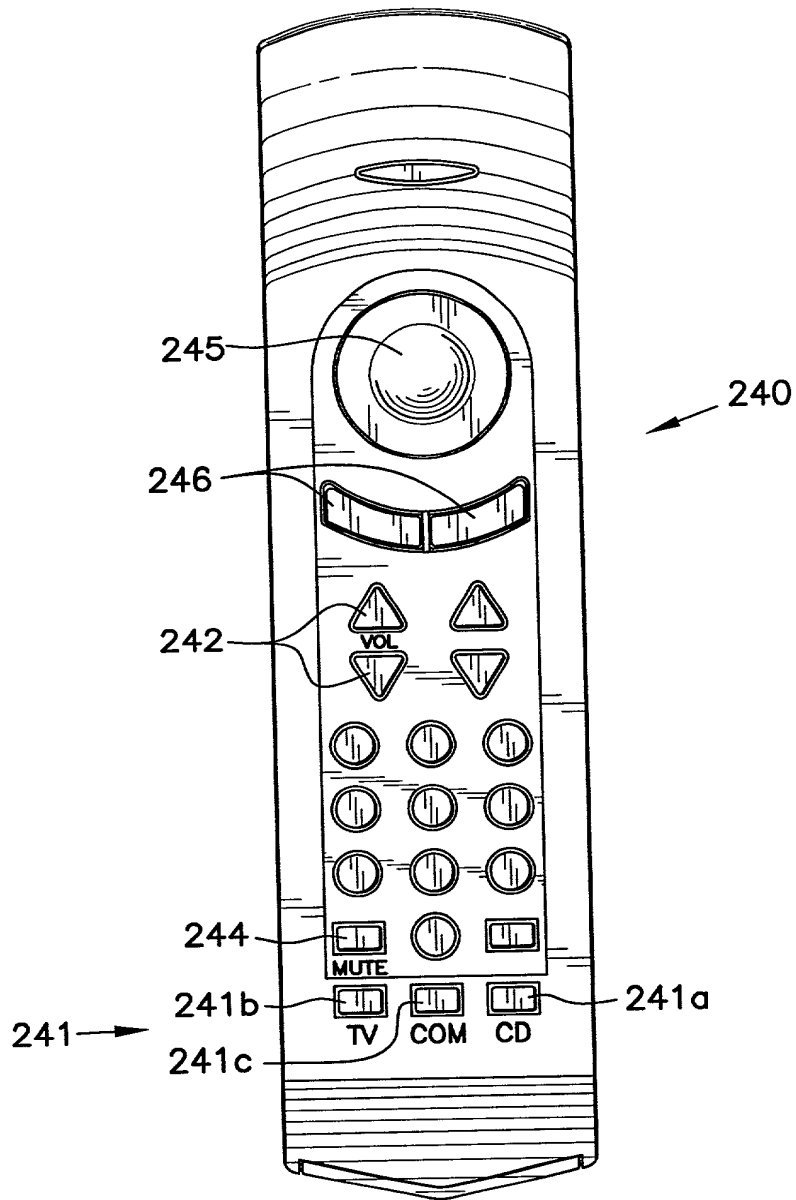


FIG. 2C

865070 "06520060

865070" 06620060

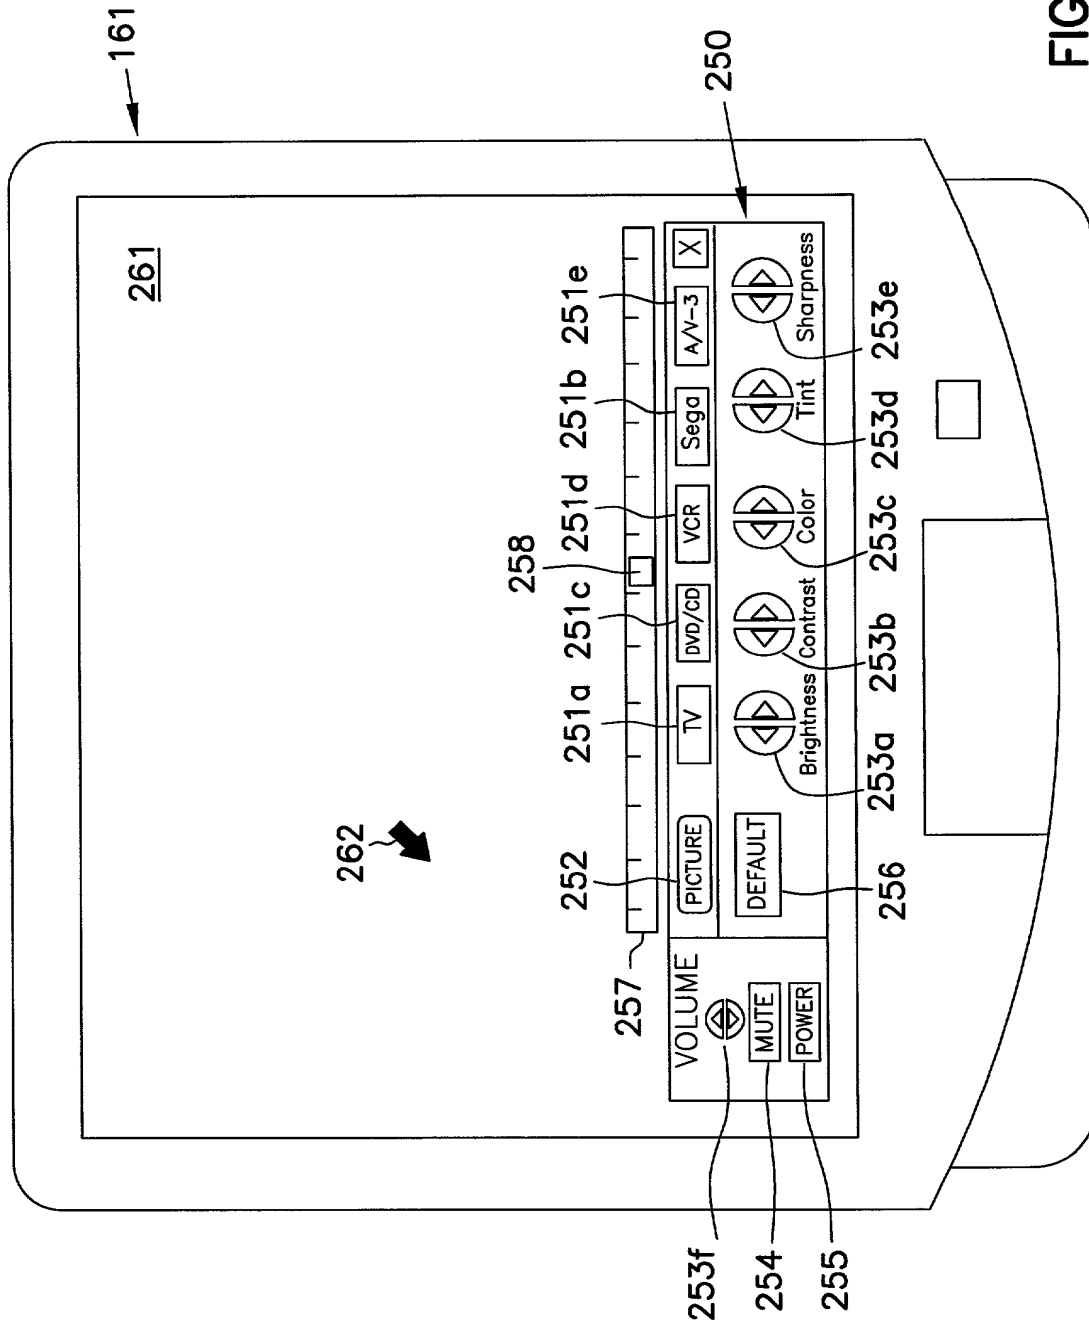


FIG. 2D

0050T0" 00020000

300

	320a BRIGHT	320b CONTR	320c COLOR	320d TINT	320e SHARP	320f VOL	320g BASS	320h TRBL	320i BAL
310a~TV	128	128	117	98	128	101	128	128	128
310b~DSS	128	128	117	98	212	101	128	128	128
310c~DVD	128	128	114	102	235	125	185	128	128
310d~VTR	125	120	117	100	103	100	185	136	128
310e~AUX	000	000	000	000	000	000	000	000	000
310f~CD1						212	137	141	108
310g~CD2						105	130	130	128
310h~MIDI						128	128	128	128
310i~AUX						000	000	000	000

310

320

330

FIG. 3A

310a~TV 310b~DSS

340

320f 320g 320i 321

VOL
BASS
TRBL
BAL
CHNL

101	128	128	128	02	~314
200	128	128	128	03	~315
212	235	200	130	13	~316
098	105	128	128	25	~317
212	235	200	130	156	~311
101	128	128	128	202	~312
200	128	128	128	214	~313

310a~TV

310b~DSS

FIG. 3B

865070" 06620060

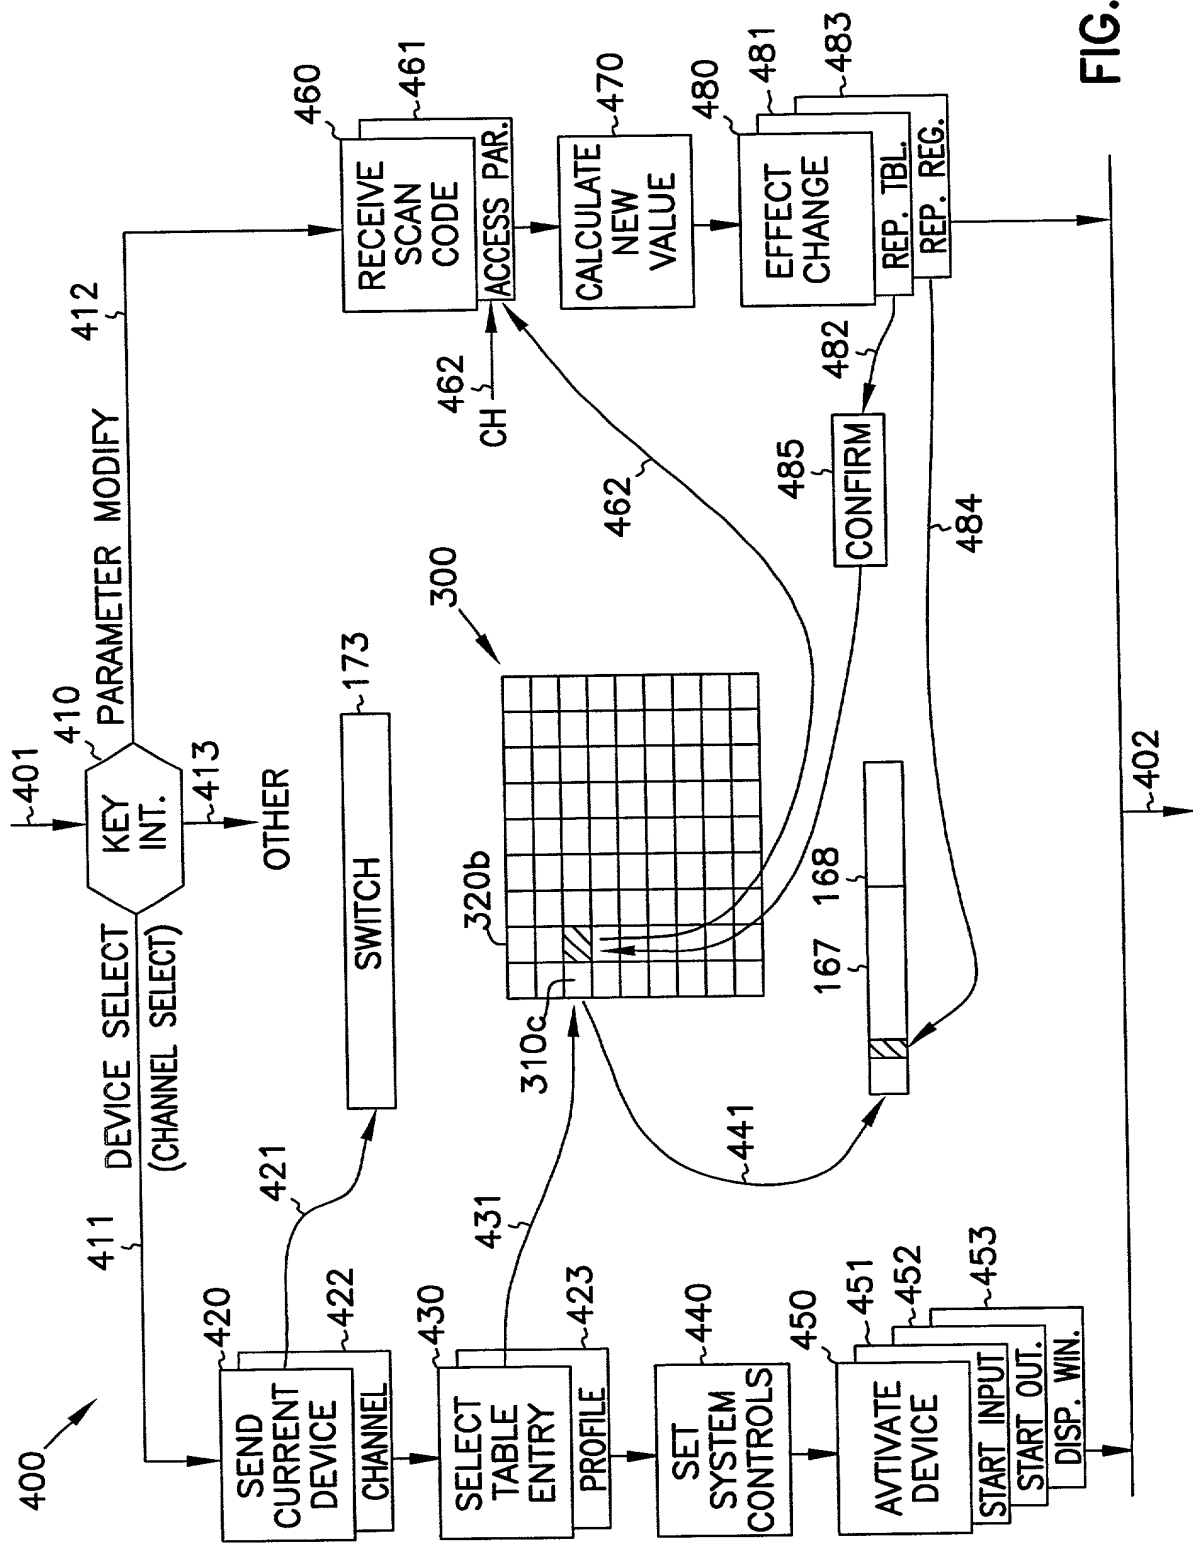


FIG. 4

865070" 06620050

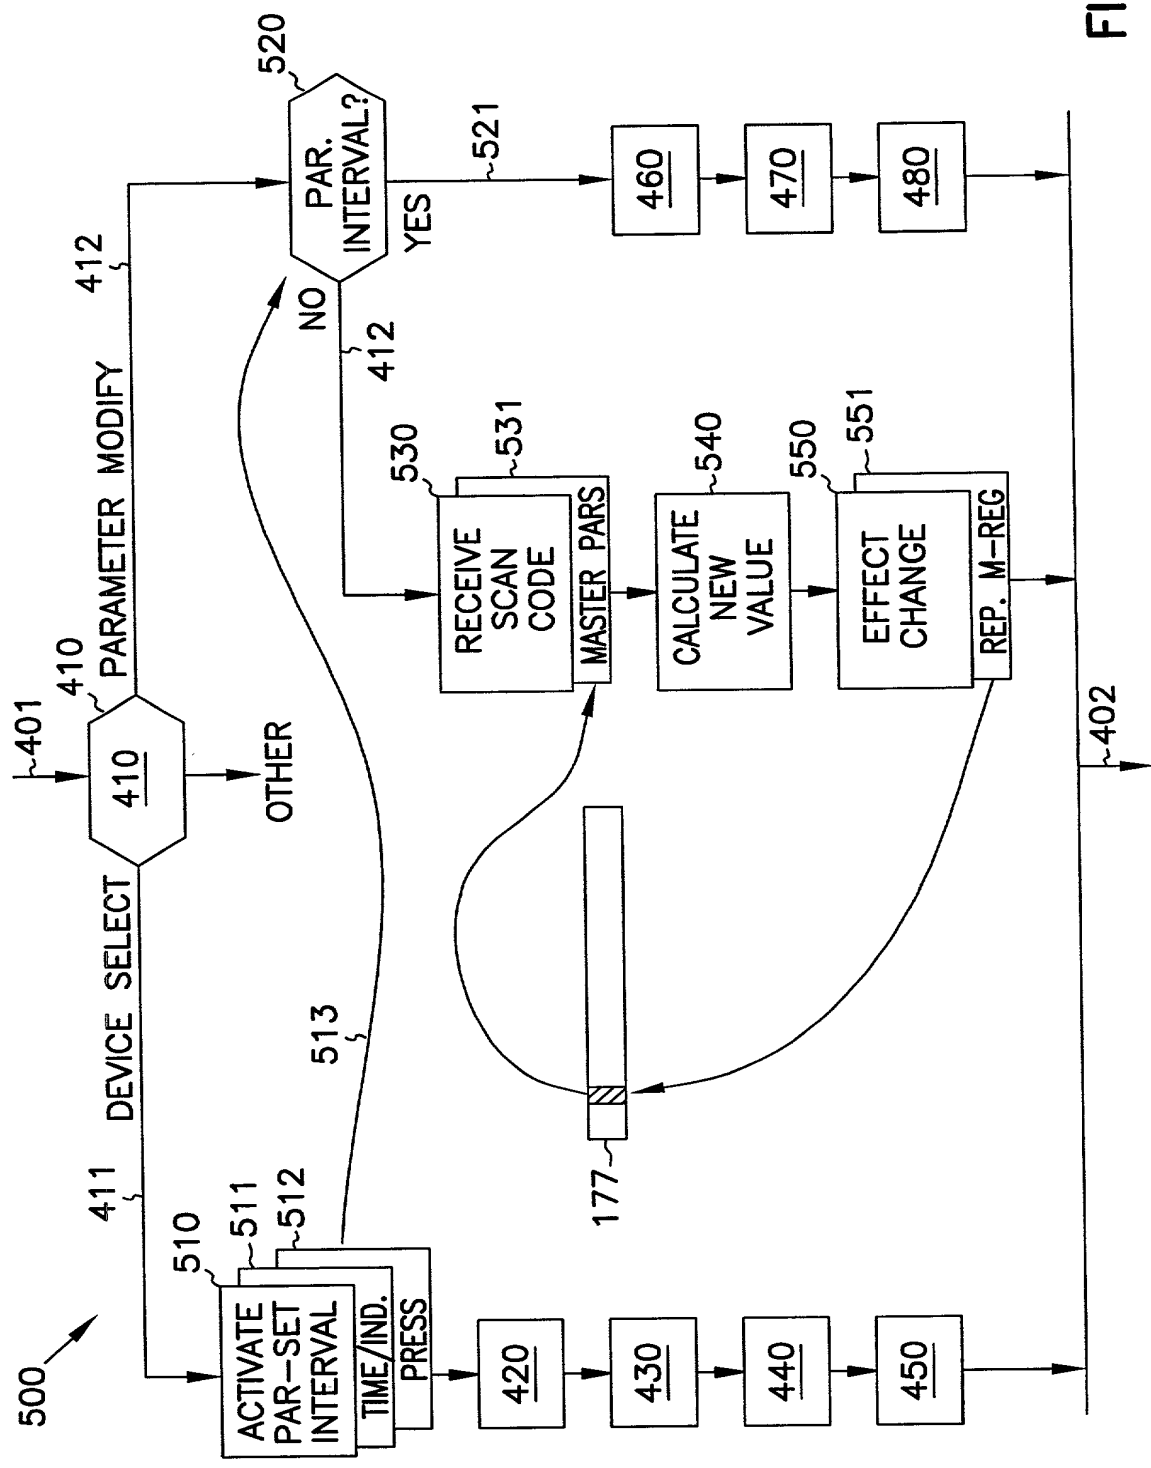


FIG. 5

United States Patent Application

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **INDIVIDUALIZED PARAMETER CONTROL FOR MULTIPLE MEDIA SOURCES IN A DATA PROCESSING SYSTEM.**

The specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56 (see page 3 attached hereto).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on the basis of which priority is claimed:

No such applications have been filed.

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

No such applications have been filed.

I hereby claim the benefit under Title 35, United States Code, § 120/365 of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

No such applications have been filed.

I hereby appoint the following attorney(s) and/or patent agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Anglin, J. Michael	Reg. No. 24,916	Dryja, Michael A.	Reg. No. 39,662	Lemaire, Charles A.	Reg. No. 36,198
Bianchi, Timothy E.	Reg. No. 39,610	Embretson, Janet E.	Reg. No. 39,665	Litman, Mark A.	Reg. No. 26,390
Billig, Patrick G.	Reg. No. 38,080	Fogg, David N.	Reg. No. 35,138	Lundberg, Steven W.	Reg. No. 30,568
Billion, Richard E.	Reg. No. 32,836	Forrest, Bradley A.	Reg. No. 30,837	Madrid, Andres N.	Reg. No. 40,710
Brennan, Thomas F.	Reg. No. 35,075	Harris, Robert J.	Reg. No. 37,346	Schwegman, Micheal L.	Reg. No. 25,816
Brooks, Edward J., III	Reg. No. 40,925	Hofmann, Rudolph P., Jr.	Reg. No. 38,187	Simboli, Paul B.	Reg. No. 38,616
Clark, Barbara J.	Reg. No. 38,107	Holloway, Sheryl S.	Reg. No. 37,850	Slifer, Russell D.	Reg. No. 39,838
Clark, George E.	Reg. No. 25,133	Klima-Silberg, Catherine I.	Reg. No. 40,052	Viksins, Ann S.	Reg. No. 37,748
Drake, Eduardo E.	Reg. No. 40,594	Kluth, Daniel J.	Reg. No. 32,146	Woessner, Warren D.	Reg. No. 30,440

I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization/who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Schwegman, Lundberg, Woessner & Kluth, P.A. to the contrary.

Please direct all correspondence in this case to Schwegman, Lundberg, Woessner & Kluth, P.A. at the address indicated below:

P.O. Box 2938, Minneapolis, MN 55402
Telephone No. (612)373-6900

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of joint inventor number 1 : **Theodore D. Wugofski**

Citizenship: **United States of America**

Residence: Fort Worth, TX

Post Office Address: 4828 Overton Hollow
Fort Worth, TX 76109

Signature: Theodore D. Wugofski Date: 2 JAN 98
Theodore D. Wugofski


Full Name of joint inventor number 2 : **Kim C. Smith**

Citizenship: **United States of America**

Residence: Colleyville, TX

Post Office Address: 4012 Ramsgate Court
Colleyville, TX 76034

Colleyville, TX 76034

Signature: 

Kim C. Smith

Date: 02 JAN 98

§ 1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
 - (i) Opposing an argument of unpatentability relied on by the Office, or
 - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.